

DS-K1T671MF Face Recognition Terminal




- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- 7-inch touch screen, 2 Mega pixel wide-angle lens
- Adjusts supplement light brightness manually
- Face recognition in dark environment
- Suggested height for face recognition between 1.4 m and 1.9 m
- Deep learning algorithm
- Face recognition distance: 0.3m to 3m
- Face anti-spoofing
- 6,000 face capacity, 5,000 fingerprint capacity, and 50,000 event capacity
- Multiple authentication modes
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- Stand-alone operation
- Transmits data to the client software via TCP/IP communication and saves the data on the client software
- Capture linkage and captured pictures saving
- Manage, search and set device data after logging in the device locally
- Connects to one external card reader or access controller via RS-485 protocol
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Two-way audio with client software, indoor station, and master station
- Remote live view via RTSP protocol; encoding mode: H.264
- NTP, manually time synchronization, and auto synchronization
- Audio prompt
- Watchdog design and tamper function
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- Supports multiple languages: English, Spanish, Arabic, Thai, Indonesian, Russian, and Vietnamese
- Supports EHome 5.0 (ISUP 5.0), and ISAPI protocol
- Configuration via web browser



▪ Specification

Screen	
Dimensions	7-inch
Type	LCD
Operation method	Capacitive touch screen
Camera	
Pixel	2 MP
Lens	2
Audio	
Tone quality	Noise suppression and echo cancellation
Network	
Wired network	10 M/100 M/1000 M self-adaptive
Interface	
Network interface	1
Lock output	1
Exit button	1
Door contact input	1
Power interface	2-pin
Authentication	
Card type	Mifare 1 card
Card reading frequency	13.56MHz
Function	
QR code recognition	Support
Face anti-spoofing	Support
Audio prompt	Support
Time synchronization	Support
Others	
Power supply method	2-pin connector
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0~90% (No condensing)
Dimensions	290 mm × 116.5 mm × 33 mm (11.4" × 4.6" × 1.3")
Protective level	IP65
Installation	Surface

▪ Dimension

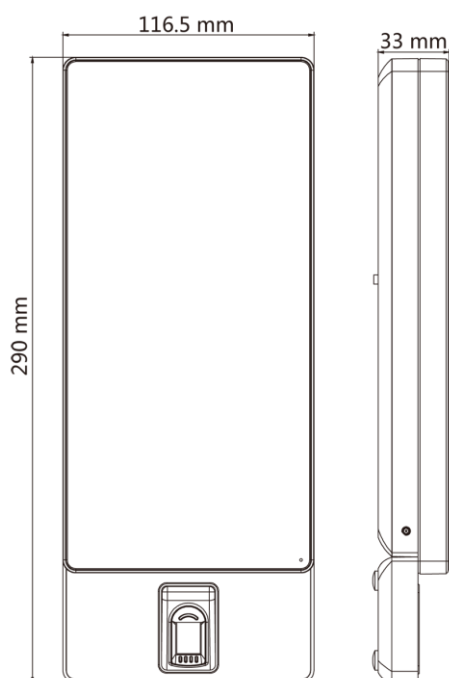

- Accessory
- Optional

DS-KAB671F Fingerprint Module	DS-KAB671-S Protective Shield	DS-KAB671-B Stand Stick
		

- Available Model
- DS-K1T671MF

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com