



Produktmerkmale

- DID-LCD-Panel auf Industrieniveau, geeignet für umfangreiche 7×24-Dauerarbeiten.
- Physikalische Auflösung von 1920×1080.
- 5ms schnelle Reaktionszeit, keine Geisterbilder.
- Neueste digitale 3D-Filterung und digitale 3D-Rauschunterdrückungstechnologie.
- Schnelle Bildreaktion; 170° breiter Betrachtungswinkel; Sicherstellung, dass die Bildanzeige nicht verformt wird.
- Eingebauter Lautsprecher.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



Wide Viewing Angles(Up to 170°)



170° (H)/170° (V)

DISPLAY CHARACTERISTICS

Mode Name	LC-ME2201-F
Screen Size	22"
Active Display Area (mm)	476.64mm(W)×268.11mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	250cd/m²
Contrast Ratio	1000:1
Viewing Angle	170(H) /170(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way

Power	DC12V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦25W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/3.5kg
MTBF	50000Hours
Certificate Approval	CE,RoHS,CCC,FCC,ISO9000, UL
Application	Monitoring , Transportation, Controlling room, ETC

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

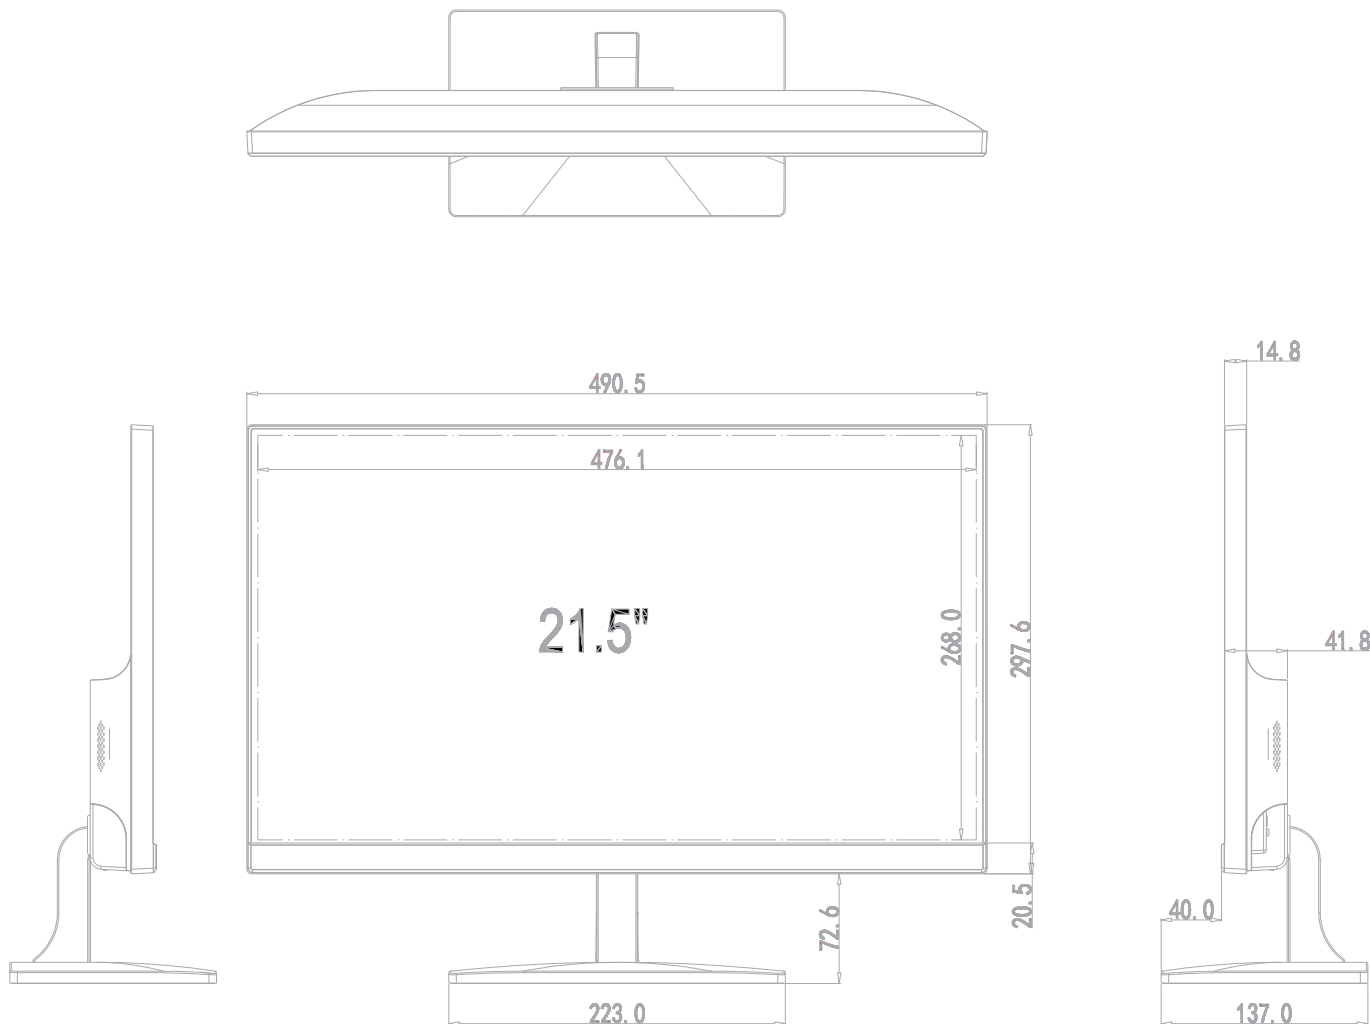

Unit:mm

